


Waveguide Pressurisation Equipment

Closely matched with the performance and specifications of our accomplished 19" rack-mounting waveguide dehydrators, the 12445 series is intended to offer our customers a range of space-saving wall-mounting alternatives. Now available with 3 levels of performance, the 12445 range suits many applications. Protruding only 16cm or 23cm from a wall, and mounting via integral keyhole slots, these units dispense with any need for additional shelving or brackets.

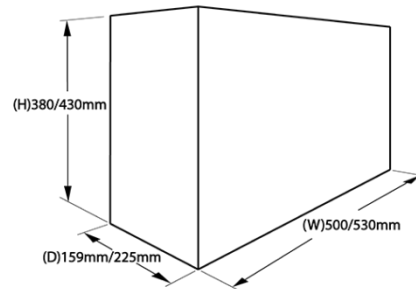

In addition to the exceptional performance now associated with Drallim dehydrators, in this case between 5 and 35 cubic feet per hour output, the 12445s are loaded with features, including the following:

- ◆ Integral air reservoir
- ◆ Adjustable output pressure regulator
- ◆ Output flow meter
- ◆ Humidity detection equipment
- ◆ Excessive run-time alarm
- ◆ Remote alarm monitoring terminal
- ◆ Digital runtime display
- ◆ High and low output pressure alarms

Unit Number	Dry Air Delivery	Output Pressure	Dry Air Dewpoint	No. of Outlets	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)	Operating Voltage
12445/S	5 ft ³ /hr	0.5 – 5 psi	-35°C	3	380	500	159	17	230v AC or 115v AC
12445/M	13 ft ³ /hr	0.5 – 5 psi	-35°C	3	430	530	225	24	230v AC
12445/L	35 ft ³ /hr	0.5 – 5 psi	-35°C	3	430	530	225	25	230v AC

Drallim Industries Limited
 Millwood House, Drury Lane,
 Ponswood Industrial Estate,
 St.Leonards on Sea,
 East Sussex. TN38 9BA, UK

t +44 (0)1424 205140
f +44 (0)1424 202140
e email@drallim.com
w www.drallim.com

An ISO 9001:2008 Approved Company
 Registered Office: Registered in England No 606278

**12445
 WALL MOUNTING
 DEHYDRATOR**

The Drallim Group

Leading innovators in technology and quality