




Irrigation Fittings

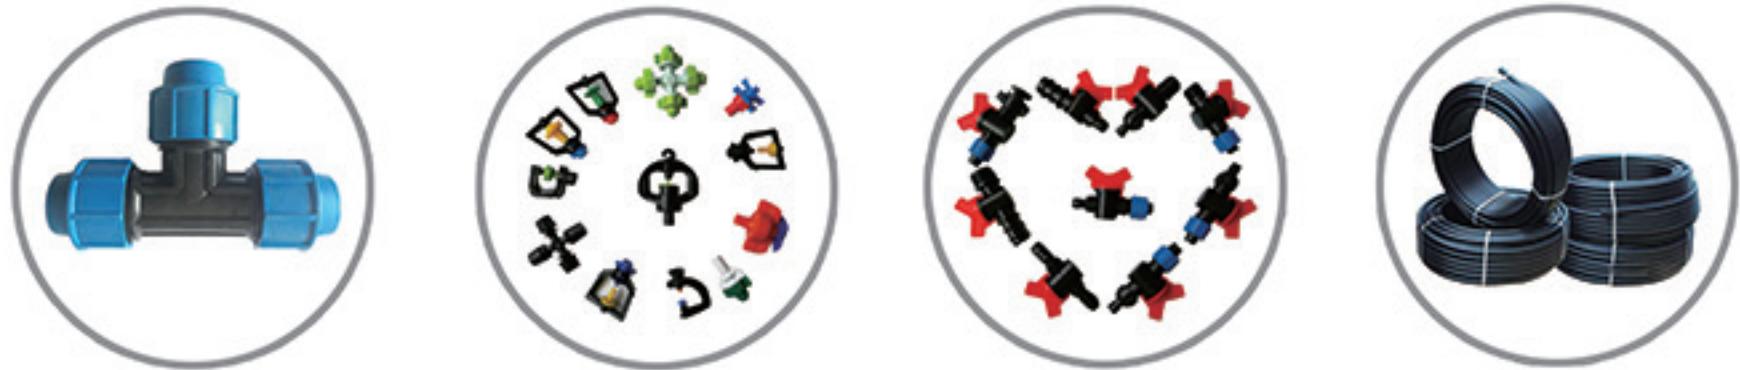

WeiFang Wilda Machinery Co.,Ltd.

Add:No.3,Yongkang Jie,Weifang Economic Development Zone,Weifang,Shandong,China.

Tel:0086-536 8651769

Fax:0086-536-8668039 Mobile:0135 0649 6031

E-mail: wilda.wang@vip.163.com/victor_wilda@163.com


Skype:victwang@hotmail.com <http://www.wildagroup.com>

潍坊威骐机械有限公司

WEIFANG WILDA MACHINERY CO.,LTD



滴灌系列 drip irrigation series

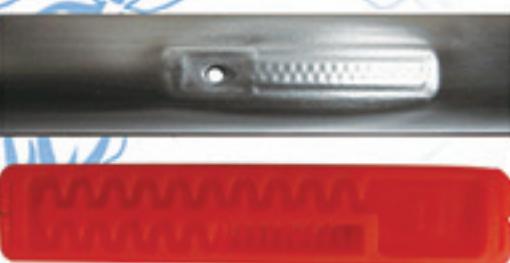内嵌贴片式滴灌带
drip tape with inner flat emitter

技术参数(parameter)

规格 spec (mm)	出水口间距 space (mm)	压力 pressure (MPa)	壁厚 thickness (mm)	流量 flow (L/h)	卷长 length per roll (m)	铺设长度 layout length (m)
§ 16	10、20、30 可调	0.1~0.2	0.2、0.3、0.4 可调	2.0、3.0	1000、1500、 2000	80~100

特点:
新型宽长流道、全素流、自冲洗、抗堵塞性能好；优选材料配方，防腐蚀、抗老化；滴水均匀度、制造偏差符合国家A类产品要求；沿程损失小，铺设长度长。

Features:
Made of 100% virgin raw materials. New wide and long flow channel, smooth flow, self-cleaning, anti-clogging, made of high quality material, anti-corrosion, anti-aging, small loss and long laying length.

内嵌圆柱式滴灌管
drip irrigation pipe with inner cylindrical dripper

技术参数(parameter)

规格 spec (mm)	出水口间距 space (mm)	压力 pressure (MPa)	壁厚 thickness (mm)	流量 flow (L/h)	卷长 length per roll (m)	铺设长度 layout length (m)
§ 16	20、30、50 可调	0.1~0.2	0.6、0.8、1.0 可调	3.0	500	80~100

特点:
圆弧型宽流道，全素流、自冲洗、抗堵塞能力强；优选材料配方，防腐蚀、抗老化；灌溉均匀度、制造偏差符合国家A类产品要求。

Features:
New style round wide flow path, smooth flow, self-cleaning, anti-clogging, made of high quality material, anti-corrosion, anti-aging, small loss and long laying length.

迷宫式滴灌带
Labyrinth drip tape

技术参数(parameter)

规格 spec (mm)	出水口间距 space (mm)	压力 pressure (MPa)	壁厚 thickness (mm)	流量 flow (L/h)	卷长 length per roll (m)	铺设长度 layout length (m)
§ 16	10、20、30	0.05~0.1	0.15、0.20	2.2、3.1	1000、2000	60~80

特点:
迷宫流道和滴孔一次整体热合型，制造精度高。素流流态并具有一定压力补偿性，铺设长度长，滴水均匀，多个进水口，抗堵塞性能好，优选材料配方，防腐蚀、抗老化，降低灌溉设备投资。

Features:
Labyrinth runner and drop hole a whole thermoforming with high precision.
The flow pattern has pressure compensation. It has many water inlet, made of high quality material, anti-corrosion, anti-aging, small loss and long laying length.

滴箭系统
arrow dripper system

技术参数(parameter)

流量flow (L/h)	压力work pressure (MPa)
1.0~4.0	0.02~0.2

特点:
◆ 迷宫长流道箭柄结构，膜片式稳流滴头，双重保障，确保出水均匀。◆ 独特的导流圆盘，渗入式灌溉。◆ 单箭、双箭、四箭等随意组合，施工方便。◆ 是盆花、盆栽植物及苗木等作物灌溉最合适的灌水器。

Features:
The labyrinth long flow channel arrow handle structure, the diaphragm type turbulent flow drop, make sure the water outlet uniformity.
It has special diversion and infiltration irrigation.
Single and double arrow free combination, it can make sure convenient construction.
Suitable for potted flowers, potted plants and seedlings and other crops.

压力补偿式滴头
pressure compensating emitter/dripper

技术参数(parameter)

压力work pressure (MPa)	流量flow (L/h)
0.08~0.4	2、4、8

特点:

◆ 借助水流压力使弹性硅胶片改变出水口断面，调节流量，使出水稳定。◆ 滴头间距根据作物株距可任意调整。◆ 灌溉均匀度高。◆ 压力补偿性强，特别适用于起伏地形，系统压力不均衡和毛管较长的情况。◆ 灵活方便，滴头可安装在各中规格（Φ 12mm~32mm）的PE管上。◆ 自动清洗，起始水流冲刷流道，抗堵塞性能好。◆ 可广泛用于温室、大棚、果树、葡萄、苗圃等作物的灌溉。

Features:

Adjust the flow with the help of the flow pressure to make the outlet water stable.
The distance between drip heads can be adjusted at will according to the plant distance of crops.
High uniformity of irrigation, strong pressure compensation, suitable for undulating terrain and system pressure imbalance. Automatic cleaning, anti - clogging.
It can be used for greenhouse, dapeng, fruit trees, grapes, nurseries and other crops irrigation.

8孔流量可调滴头
flow adjustable micro irrigation dripper

技术参数 (parameter)

流量flow (L/h)
0~80

特点:

◆ 可调式管上滴头由新型材料制作而成，根据效果分为不同的类型，上面的小滴头向左拧可以关闭，向右拧可以调节出水流量。◆ 根据管道前后压力差异可自行调节出水量达到压力补偿的效果，低头如若堵塞可进行拆洗避免滴头堵塞。◆ 可于PE软管打孔直接接入。

Features:

New materials, adjustable water output or can be closed.
The clogging can be removed and washed.
Connect with PE pipe.

稳流器
on line dripper

技术参数 (parameter)

流量flow (L/h)	压力work pressure (MPa)
10、20、30、40、50	0.1~0.3

特点:

◆ 具有超强的抗阻能力，一般不易阻塞。◆ 灌水均匀度高，在5米~35米水头的范围内精确控制水量。◆ 价格低廉，可以简化设计，安装方便快捷，用材料省。◆ 灌水量较大，适应范围广。适合果树、葡萄园、园林等节水形式。

Features:

Anti-clogging, uniform irrigation, accurate control of water.
Low price, simple design and convenient installation.
It's suitable for fruit trees, vineyards and gardens water irrigation.

分流管 shunt pipe



技术参数 (parameter)

流量flow (L/h)	压力work pressure (MPa)
10、20、30	0.08~0.15

特点:

安装在稳流器之后，放在果树主杆周围，使果树四周根系得到更好的生长。

Features:

Connect following on-line-dripper, make the roots grow better.

插尖滴头
micro dripper on stakes

技术参数 (parameter)

流量flow (L/h)	压力work pressure (MPa)
1.0~40	0.2







特点:

伞状水形喷洒，均匀美观，流量可调，适用于树木各生长周期，可拆卸清洗使用寿命长。








Features:

Umbrella spray, uniform and beautiful, adjustable flow. Suitable for all growth cycles of trees, removable and washable, used for long time.

微喷系列 micro sprinkler series

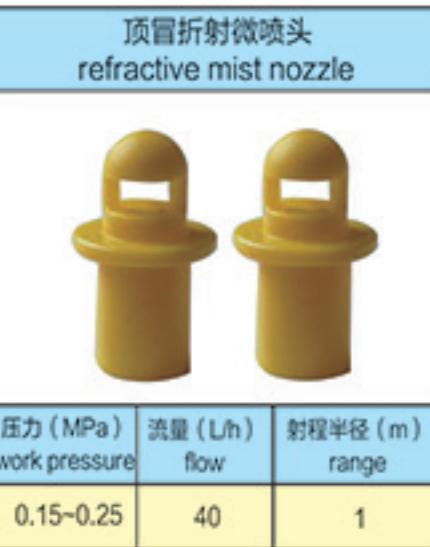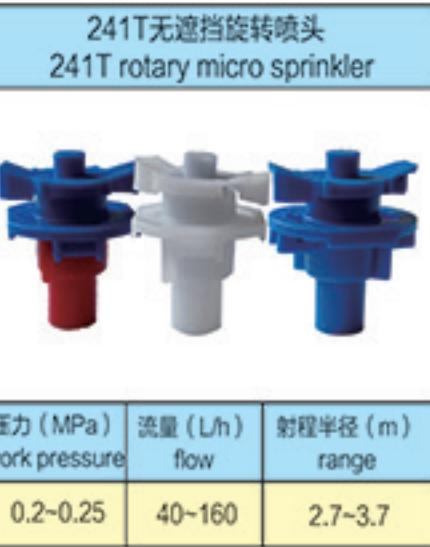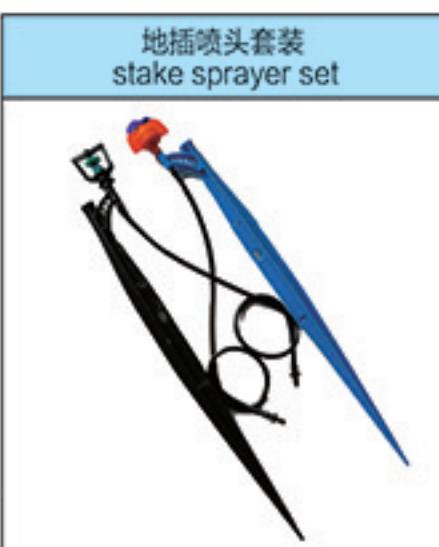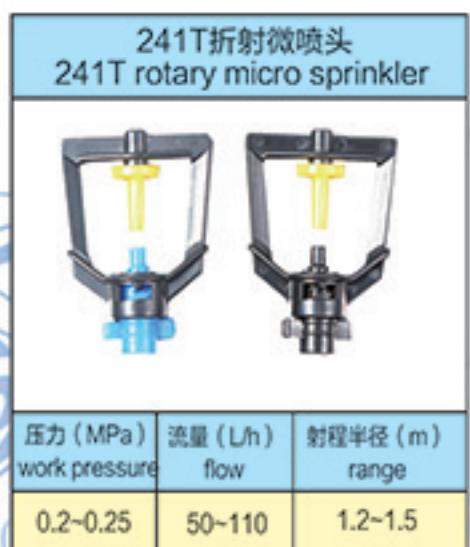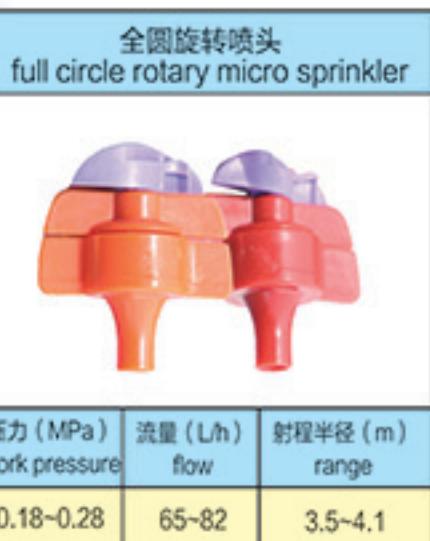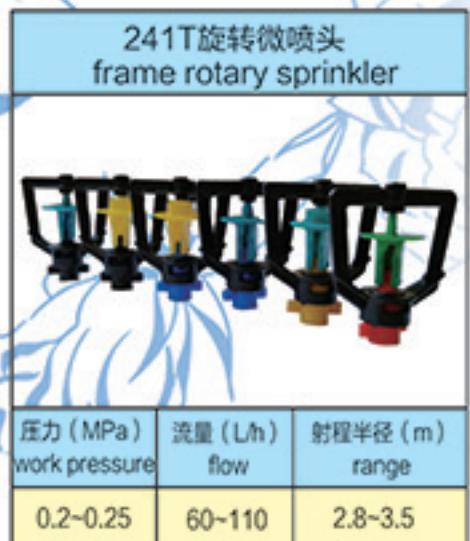

喷灌系列 spray irrigation system

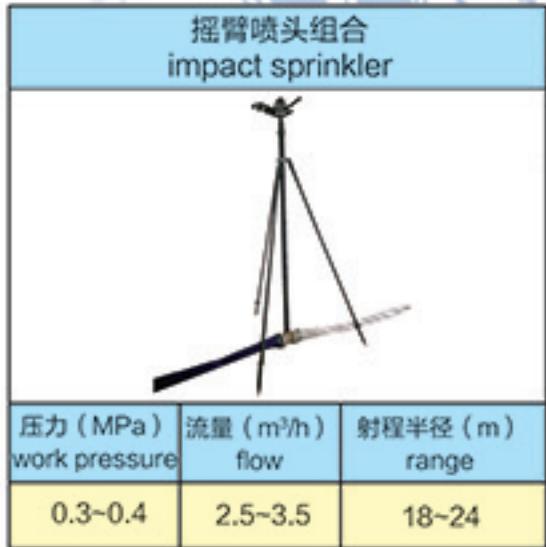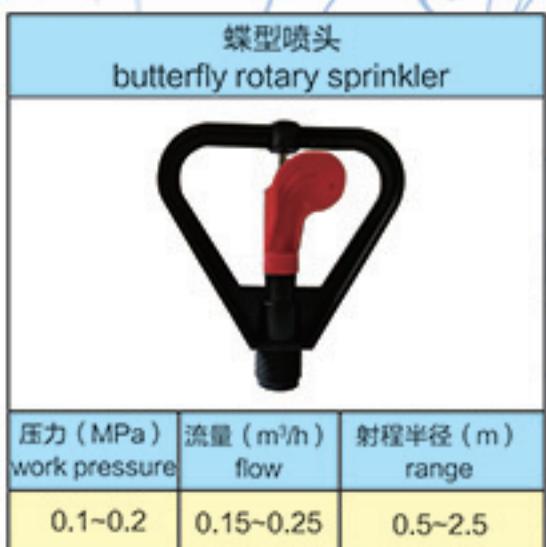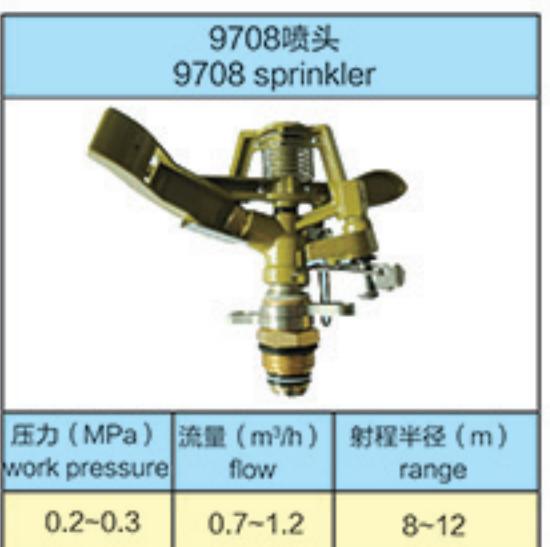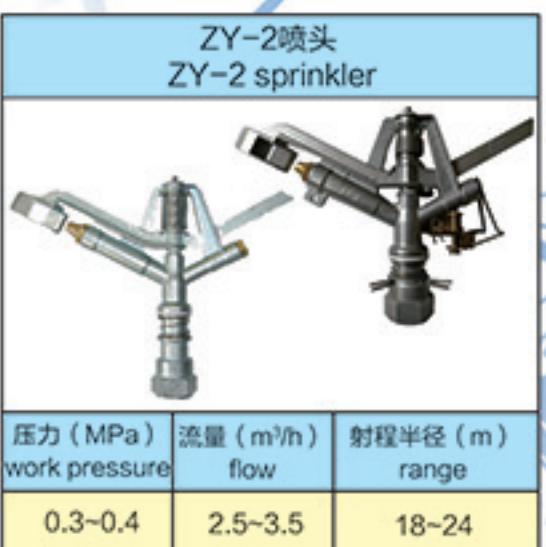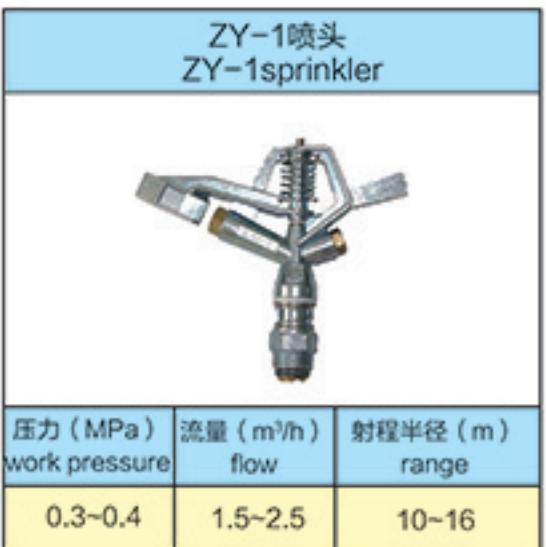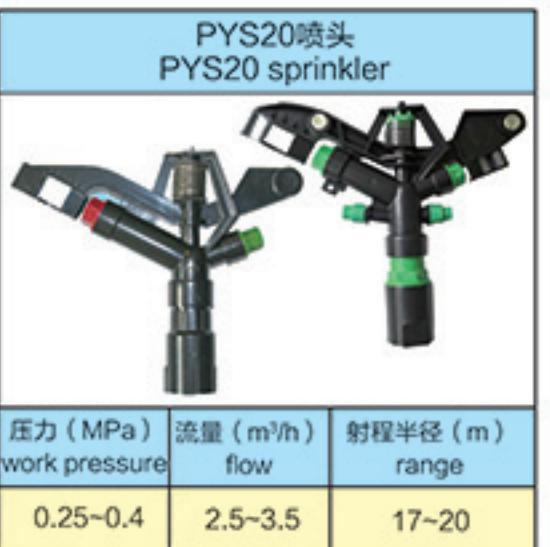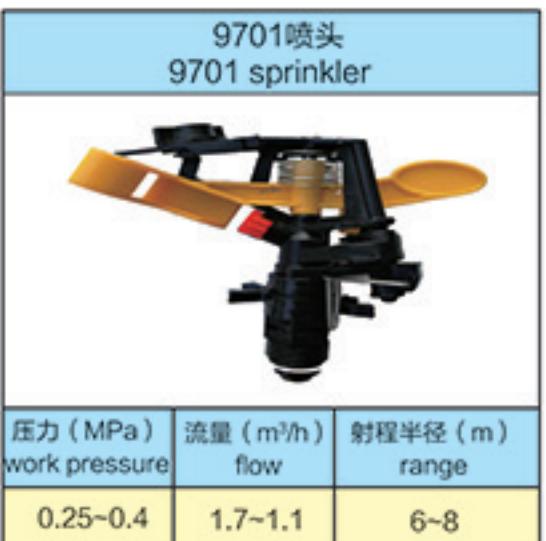

滴灌阀门系列 Drip Irrigation Valves



PE快接管件 compression fittings

同径三通equal tee	规格spec	同径直接coupling	规格spec	同径弯头eibow	规格spec
(等径三通)	Φ20 Φ25 Φ32 Φ40 Φ50 Φ63 Φ75	(等径直接连接)	Φ20 Φ25 Φ32 Φ40 Φ50 Φ63 Φ75	(等径弯头)	Φ20 Φ25 Φ32 Φ40 Φ50 Φ63 Φ75
变径三通reducing tee	规格spec	变径直接reducing coupling	规格spec	堵头end cap	规格spec
(变径三通)	Φ25*20 Φ32*20 Φ32*25 Φ40*20 Φ40*25 Φ40*32 Φ50*20 Φ50*25 Φ50*32 Φ50*40 Φ63*20 Φ63*25 Φ63*32 Φ63*40 Φ63*50 Φ75*63	(变径直接连接)	Φ25*20 Φ32*20 Φ32*25 Φ40*20 Φ40*25 Φ40*32 Φ50*20 Φ50*25 Φ50*32 Φ50*40 Φ63*20 Φ63*25 Φ63*32 Φ63*40 Φ63*50 Φ75*63	(堵头)	Φ20 Φ25 Φ32 Φ40 Φ50 Φ63 Φ75
快接球阀3 ways ball valve	规格spec	快接球阀ball valve	规格spec		
(快接球阀 3 路)	Φ20 Φ25 Φ32 Φ40 Φ50 Φ63	(快接球阀)	Φ20 Φ25 Φ32 Φ40 Φ50 Φ63		

简易管件 mini pipe fittings



工具系列 tools



水带管件 layflat hose fittings

软带内丝 female thread adaptor	规格spec	软带外丝 male thread adaptor	规格spec	软带弯头 elbow	规格spec
	Φ32		Φ32*1"		Φ32
	Φ40		Φ40*1.2"		Φ40
	Φ50		Φ50*1.5"		Φ50
	Φ63		Φ63*2"		Φ63
	Φ75		Φ75*2.5"		Φ75
	Φ90		Φ90*3"		Φ90
	Φ110		Φ110*4"		Φ110
软带直接 coupling	规格spec	软带三通 tee	规格spec	软带堵头 end cap	规格spec
	Φ32		Φ32		Φ50
	Φ40		Φ40		Φ63
	Φ50		Φ50		Φ75
	Φ63		Φ63		Φ90
	Φ75		Φ75		Φ110
	Φ90		Φ90		
	Φ110		Φ110		
软带四通 4 way cross connector	规格spec		软带变接 reducing adaptor	规格spec	
	Φ50		Φ110	Φ63*50	
	Φ63		Φ50*1"	Φ75*63	
	Φ75		Φ50*1.5"	Φ90*75	
	Φ90		Φ63*1"	Φ90*63	
	Φ63*1"		Φ63*1.2"	Φ110*63	
	Φ63*2"		Φ63*50		
	Φ75*1"		Φ63*2"	Φ50*25	
	Φ75*1.5"		Φ75*1"	Φ63*25	
	Φ75*2"		Φ75*1.5"	4 way valve for tape	
	Φ75*2.5"		Φ75*2"	规格spec	
	Φ90*1.2"		Φ75*2.5"	Φ50*25	
	Φ90*1.5"		Φ90*1.2"	Φ63*25	
	Φ90*2"		Φ90*1.5"		
	Φ90*3"		Φ90*2"		
	Φ110*2"		Φ90*2.5"		
			Φ90*3"		
			Φ110*1.5"		
			Φ110*2"		

喷灌带 spray hose



输水带 layflat hose



规格 spec		壁厚 thickness	孔口间距 space	孔口 hole	比重 proportion	流量 flow	铺设长度 settlementlength	喷洒直径 wet diameter	标准件 standard QTY
直径 mm	折径 (mm)	(cm)		形式	(m/kg)	m³/h/10m	m	m	(米/卷)
Φ25+0.1	40	0.2	30	斜三孔	50	1.0	40	2	200
Φ32+0.1	50	0.2	30	斜五孔	50	1.65	50	3	200
Φ40+0.1	63	0.2	30	斜五孔	40	1.65	80	4	200
Φ50+0.2	80	0.3	50	斜七孔	22	1.4	100	5	150
Φ63+0.2	100	0.3	50	斜七孔	17	1.4	120	6	150
Φ90+0.2	140	0.3	80	斜九孔	12	1.08	180	7	100
Φ110+0.3	175	0.4							100



输水带参数 specification

规格 size	壁厚 thickness	比重 proportion		规格 size	壁厚 thickness	比重 proportion	
mm	mm	Kg/m	m/Kg	mm	mm	Kg/m	m/Kg
Φ 32	0.4	0.0417	24	Φ 75	1.2	0.292	3.43
	0.5	0.0519	19.3		1.4	0.34	2.94
Φ 40	0.4	0.0522	19.16	Φ 90	0.5	0.148	6.76
	0.5	0.0651	15.36		0.6	0.177	5.65
Φ 50	0.5	0.0824	12.14	Φ 110	0.8	0.235	4.26
	0.6	0.0977	10.24		1.0	0.293	3.41
Φ 63	0.8	0.13	7.69	Φ 110	1.2	0.351	2.85
	1.0	0.162	6.17		1.4	0.409	2.45
Φ 75	0.5	0.103	9.7	Φ 110	1.6	0.466	2.15
	0.6	0.123	8.13		0.6	0.216	4.63
Φ 90	0.8	0.164	6.1	Φ 110	0.8	0.288	3.47
	1.0	0.204	4.9		1.0	0.359	2.79
Φ 110	1.2	0.245	4.08		1.2	0.43	2.33
	0.5	0.123	8.13		1.4	0.5	2
Φ 110	0.6	0.147	6.8		1.6	0.572	1.75
	0.8	0.196	5.1		1.8	0.642	1.56
Φ 110	1.0	0.244	4.1				

PE滴管、PE直管 PE pipes



PE滴管



PE直管

PE63给水直管规格表

公称外径dnmm	公称压力PN,MPa				
	0.32	0.4	0.6	0.8	1.0
20				2.3	2.3
25			2.3	2.3	2.3
32			2.3	2.4	2.9
40		2.3	2.3	3.0	3.7
50		2.3	2.9	3.7	4.6
63	2.3	2.5	3.6	4.7	5.8
75	2.3	2.9	4.3	5.6	6.8
90	2.8	3.5	5.1	6.7	8.2
110	3.4	4.2	6.3	8.1	10.0
125	3.9	4.8	7.1	9.2	11.4
140	4.3	5.4	8.0	10.3	12.7
160	4.9	6.2	9.1	11.8	14.6
180	5.5	6.9	10.2	13.3	16.4
200	6.2	7.7	11.4	14.7	18.2
225	6.9	8.6	12.8	16.6	20.5
250	7.7	9.6	14.2	18.4	22.7
280	8.6	10.7	15.9	20.6	25.4
315	9.7	12.1	17.9	23.2	28.6
355	10.9	13.6	20.1	26.1	32.2
400	12.3	15.3	22.7	29.4	36.3

特点:

- ◆韧性好、适应地形能力强，铺设方便。◆寿命长、具有抗老化能力，在地面上裸晒8年以上。
- ◆连接方便，有专用的快速连接管件。◆规格齐全，适用于不同的使用环境。
- ◆适用于农村自来水、城乡供水、农村灌溉、地源热泵等领域。

Features:

Good toughness, strong ability to adapt to the terrain, convenient laying. Long life, anti-aging, can be exposed to the ground for more than 8 years. Convenient connection, there are special fast connection fittings. Complete specifications, suitable for tap water, rural irrigation, geo-heat pump and other fields.

PE滴管(以外径为标准)参数表

规格spec	壁厚size	偏差thickness	m/kg
Φ16	1.0	0.2	20
Φ20	1.5	0.4	11
Φ25	1.8	0.4	7.5
Φ32	2.2	0.5	5
Φ40	2.6	0.5	3.3
Φ50	3.0	0.6	2.4
Φ63	3.5	0.6	1.4
Φ75	4.7	0.7	0.9
Φ90	5.0	0.8	0.67

PE80给水直管规格表

公称外径dnmm	公称压力PN,MPa				
	0.4	0.6	0.8	1.0	1.25
20					
25		2.3	2.3	2.3	
32		2.3	2.4	2.9	
40	2.3	2.3	3.0	3.7	
50	2.3	2.9	3.7	4.6	
63	2.3	2.5	3.6	4.7	5.8
75	2.3	2.9	4.3	5.6	6.8
90	2.8	3.5	5.1	6.7	8.2
110	3.4	4.2	6.3	8.1	10.0
125	3.9	4.8	7.1	9.2	11.4
140	4.3	5.4	8.0	10.3	12.7
160	4.9	6.2	9.1	11.8	14.6
180	5.5	6.9	10.2	13.3	16.4
200	6.2	7.7	11.4	14.7	18.2
225	6.9	8.6	12.8	16.6	20.5
250	7.7	9.6	14.2	18.4	22.7
280	8.6	10.7	15.9	20.6	25.4
315	9.7	12.1	17.9	23.2	28.6
355	10.9	13.6	20.1	26.1	32.2
400	12.3	15.3	22.7	29.4	36.3

PE80给水直管规格表

公称外径dnmm	公称压力PN,MPa				
	0.4	0.6	0.8	1.0	1.25
20					
25					2.3
32					3.0
40					3.7
50					4.6
63	2.7	3.3	3.8	4.7	5.8
75	2.9	3.8	4.5	5.6	6.8
90	3.5	4.3	5.4	6.7	8.2
110	4.1	5.3	6.6	8.1	10.0
125	4.2	6.0	7.4	9.2	11.4
140	4.3	6.7	8.3	10.3	12.7
160	4.9	7.7	9.5	11.8	14.6
180	5.5	8.6	10.7	13.3	16.4
200	6.2	9.6	11.9	14.7	18.2
225	6.9	10.8	13.4	16.6	20.5
250	7.7	11.9	14.8	18.4	22.7
280	8.6	13.4	16.6	20.6	25.4
315	9.7	15.0	18.7	23.2	28.6
355	10.9	16.9	21.1	26.1	32.2
400	12.3	19.1	23.7	29.4	36.3

PVC给水管材 PVC pipes



特点:

PVC管具有耐酸、耐碱、耐腐蚀性，对于化学工业、废水排水、卫生下水道等用途，甚为适合。

PVC管的壁面光滑，对流体之阻力小，其粗糙系数仅0.009，较其他管材为低，在同口径之情况下，流量较大，且不附着水垢。

PVC管由溶解实验的结果证实不影响水质，绝无“红水”的弊病，为目前自来水配管之最佳管材。

PVC管的接合施工迅速简易，故施工工程费用低廉。

Features:

PVC pipe has acid resistance, alkali resistance, corrosion resistance. It's suitable for chemical industry, waste water drainage, sanitary sewer and other USES. PVC pipe wall smooth, small resistance to the fluid, rough coefficient is only 0.009. It has higher flow than other pipes. PVC pipe does not affect water quality, construction is easy and cost is lower.

产品规格:

PVC-M绿色无铅高抗冲给水管道执行标准为CJ/T272-2008

公称压力等级和规格尺寸：单位：mm

PVC-M高压给水管材参数表

公称外径	压力(MPa)	偏差(mm)	近似重量(kg/m)	长度(mm)
50	0.6	1.6+0.4	0.4	6000
63	0.6	2.0+0.4	0.64	6000
75	0.4	1.5+0.4	0.6	6000
75	0.6	2.2+0.5	0.82	6000
75	0.8	2.9+0.5	1.06	6000
90	0.4	1.8+0.4	0.86	6000
90	0.6	2.7+0.5	1.18	6000
90	0.8	3.5+0.6	1.53	6000
110	0.25	1.4+0.4	0.92	6000
110	0.4	2.2+0.4	1.24	6000
110	0.6	2.7+0.5	1.48	6000
110	0.8	3.4+0.6	1.84	6000
125	0.4	2.5+0.5	1.54	6000
125	0.6	3.7+0.6	1.63	6000
125	0.8	4.4+0.7	2.37	6000
140	0.4	2.8+0.5	1.98	6000
140	0.8	4.1+0.7	2.99	6000
160	0.25	2.3+0.5	1.45	6000
160	0.4	3.2+0.6	2.52	6000
160	0.6	4.0+0.6	3.18	6000
160	0.8	4.9+0.9	3.89	6000
200	0.4	3.9+0.6	3.76	6000
200	0.6</td			

施肥器系列 fertilizer injector



32、40、50、63、75、90
文丘里施肥器（支持定做）
ventury fertilizer injector
(customized)



新型组装文丘里注肥器
(支持定做)
new type ventury fertilizer
injector(customized)



比例施肥器
proportion
fertilizer injector



15L、25L、50L、
施肥罐
fertilizer tanks



100L、150L、200L、
施肥罐
fertilizer tanks

网式过滤器 screen filter



25Y/32Y/40Y
网式过滤器
screen filter



50Y网式过滤器
screen filter



63Y网式过滤器
screen filter



75Y网式过滤器
screen filter



2.5"、3"、4"
钢制网式过滤器
steel screen filter



叠片过滤器 disc filter



25Y 32Y 40Y 50Y
叠片过滤器
disc filter



63Y 75Y 90Y
叠片过滤器
disc filter



75T/90T
叠片过滤器
disc filter



110H叠片过滤器
110H disc filter

出水口	出水口	浮球式出水口	铁制出水口	截阀体及开关
规格: 63~160	规格: 63~160	规格: 90~110	规格: 50~200	规格: 63~160
快速取水阀	PE出水口	铝方便体	玻璃钢出水口	PE管材专用
规格: 25~32	规格: 63×1"	规格: 32	规格: 63~110	规格: 63~160

出水口系列 water outlet

离心、砂石过滤器 centrifugal type filter/sand filter




3"、4"、6" 离心过滤器 centrifugal type filter



4"、6" 砂石过滤器 sand filter


流量 m³/h	类别	砂石过滤器	离心过滤器	网式过滤器	叠片过滤器
1"				1~7全塑	1~5
5/4"				1~7全塑	1~5
3/2"				5~15全塑	7~12
2"	5~17	5~20	5~20全塑(钢)	12~18	
3"	10~35	10~40	10~40全塑(钢)	15~38	
4"	20~70	40~80	30~70全塑(钢)		
6"	160~220	160~220			

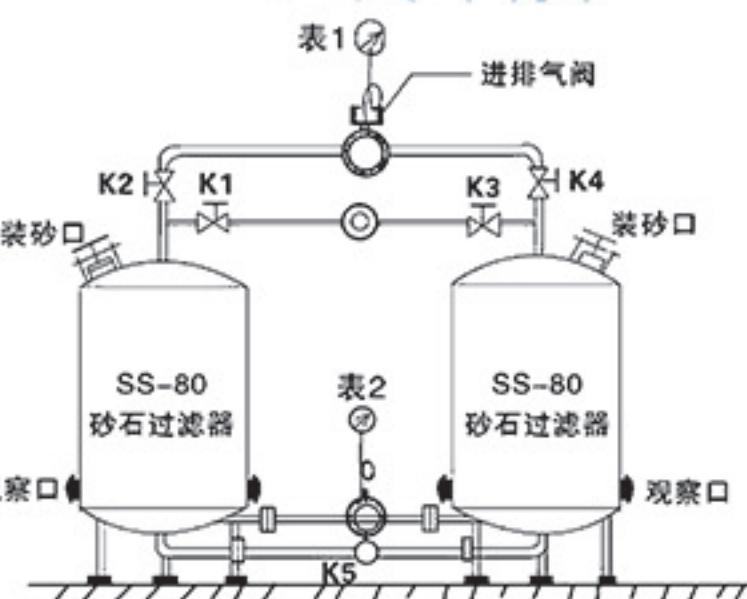

水肥一体机 water fertilizer integrated machine




8~10路施肥通道
分区控制可控4~120个电磁阀
施肥、土壤EC/PH双路检测
手机电脑远程APP
双联过滤 自动反冲洗
恒压供水 气象站功能

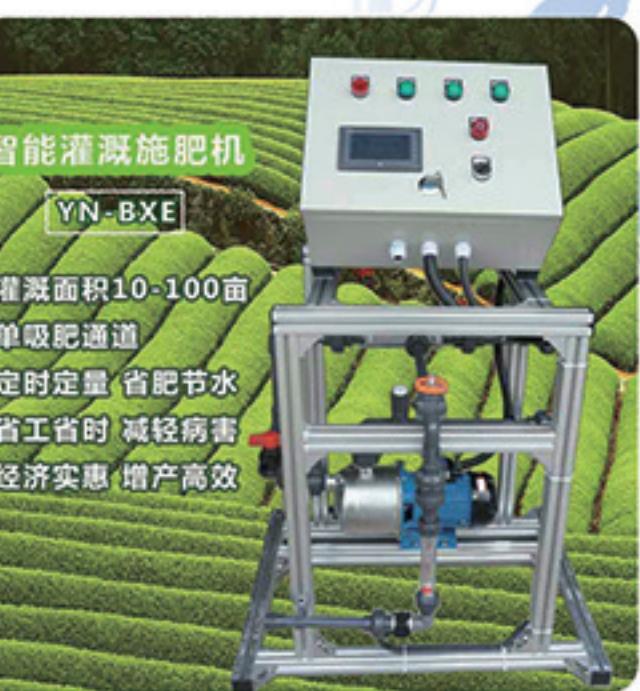

智能灌溉施肥机
YN-BXE
灌溉面积10~100亩
单吸肥通道
定时定量 省肥节水
省工省时 减轻病害
经济实惠 增产高效

PVC管件 PVC pipe fittings

90° / 45° 弯头 eibow

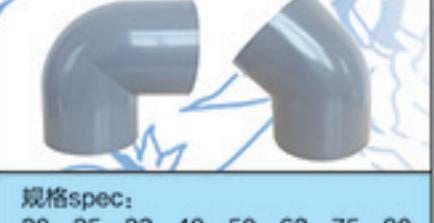

规格spec:
20、25、32、40、50、63、75、90、
110、125、140、160、200、225、
250、315、355、400

外丝/内丝接头 male/female thread adaptor



规格spec:
20、25、32、40、50、63、75、90、
110

同径直接/变径直接 equal/reducing coupling



规格spec:
20、25、32、40、50、63、75、90、
110、125、140、160、200、225、
250、315、355、400

正/异三通 equal/reducing tee



规格spec:
20、25、32、40、50、63、75、90、
110、125、140、160、200、225、
250、315、355、400

鞍型增接口 saddle clamp



规格spec:
63X25、63X32、75X25、75X32、90X32、
90X50、90X63、110X32、110X50、
110X63、125X50、125X63、160X50、
160X63、200X63、200X75、200X90、

活套法兰 flange



规格spec:
50、63、75、90、110、125、140、
160、200、225、250、315、355、
400

管堵 end cap



规格spec:
20、25、32、40、50、63、75、90、
110、125、140、160、200、225、
250、315、355、400

平口/丝口球阀 ball valve



规格spec:
20、25、32、40、50、63、75、90、
110、125、140、160、200、225、
250、315、355、400

PE热熔对接管件/热熔承插管件 PE hotmelt pipe fittings

正三通 equal tee



规格spec:
20、25、32、40、50、63、75、90、
110、125、140、160、200、225、
250、315、355、400

活套法兰 flange



规格spec:
50、63、75、90、110、125、140、
160、200、225、250、315、355、
400

管堵 end cap



规格spec:
20、25、32、40、50、63、75、90、
110、125、140、160、200、225、
250、315、355、400

90° / 45° 弯头 eibow



规格spec:
20、25、32、40、50、63、75、90、
110、125、140、160、200、225、
250、315、355、400

PP鞍型增接口 PP saddle clamp



规格spec:
30X20、32X25、40X20、40X25、
40X32、50X20、50X25、50X32、
63X20、63X25、63X32、75X20、
75X25、75X32、75X50

抢修节 repair section



规格spec:
20、25、32、40、50、63、75、90、
110、125、140、160、200

球阀/截止阀 valve



规格spec:
20、25、32、40、50、63、75、90、
110、125、140、160、200

外丝/内丝接头 male/female thread adaptor



规格spec:
20、25、32、40、50、63、75、90、
110、125、140、160

异径三通 reducing tee




规格spec:
25X20、32X20、32X25、40X20、40X25、40X32、
50X20、50X25、50X32、50X40、63X20、63X25、
63X32、63X40、63X50、75X32、75X40、75X50、
75X63、90X40、90X50、90X63、90X75、110X50、
110X63、110X75、110X90、125X75、125X90、
125X110、140X110、160X90、160X110、160X125、
160X140、200X110、200X125、200X140、200X160、

异径接头 reducing coupling



规格spec:
63X25、63X32、63X40、63X50、75X32、75X40、
75X50、75X63、90X40、90X50、90X63、90X75、
110X50、110X63、110X75、110X90、125X75、
125X90、125X110、140X110、160X90、160X110、
160X125、160X140、200X110、200X125、200X140、
200X160、225X110

园林微灌系统图 drip irrigation system for garden

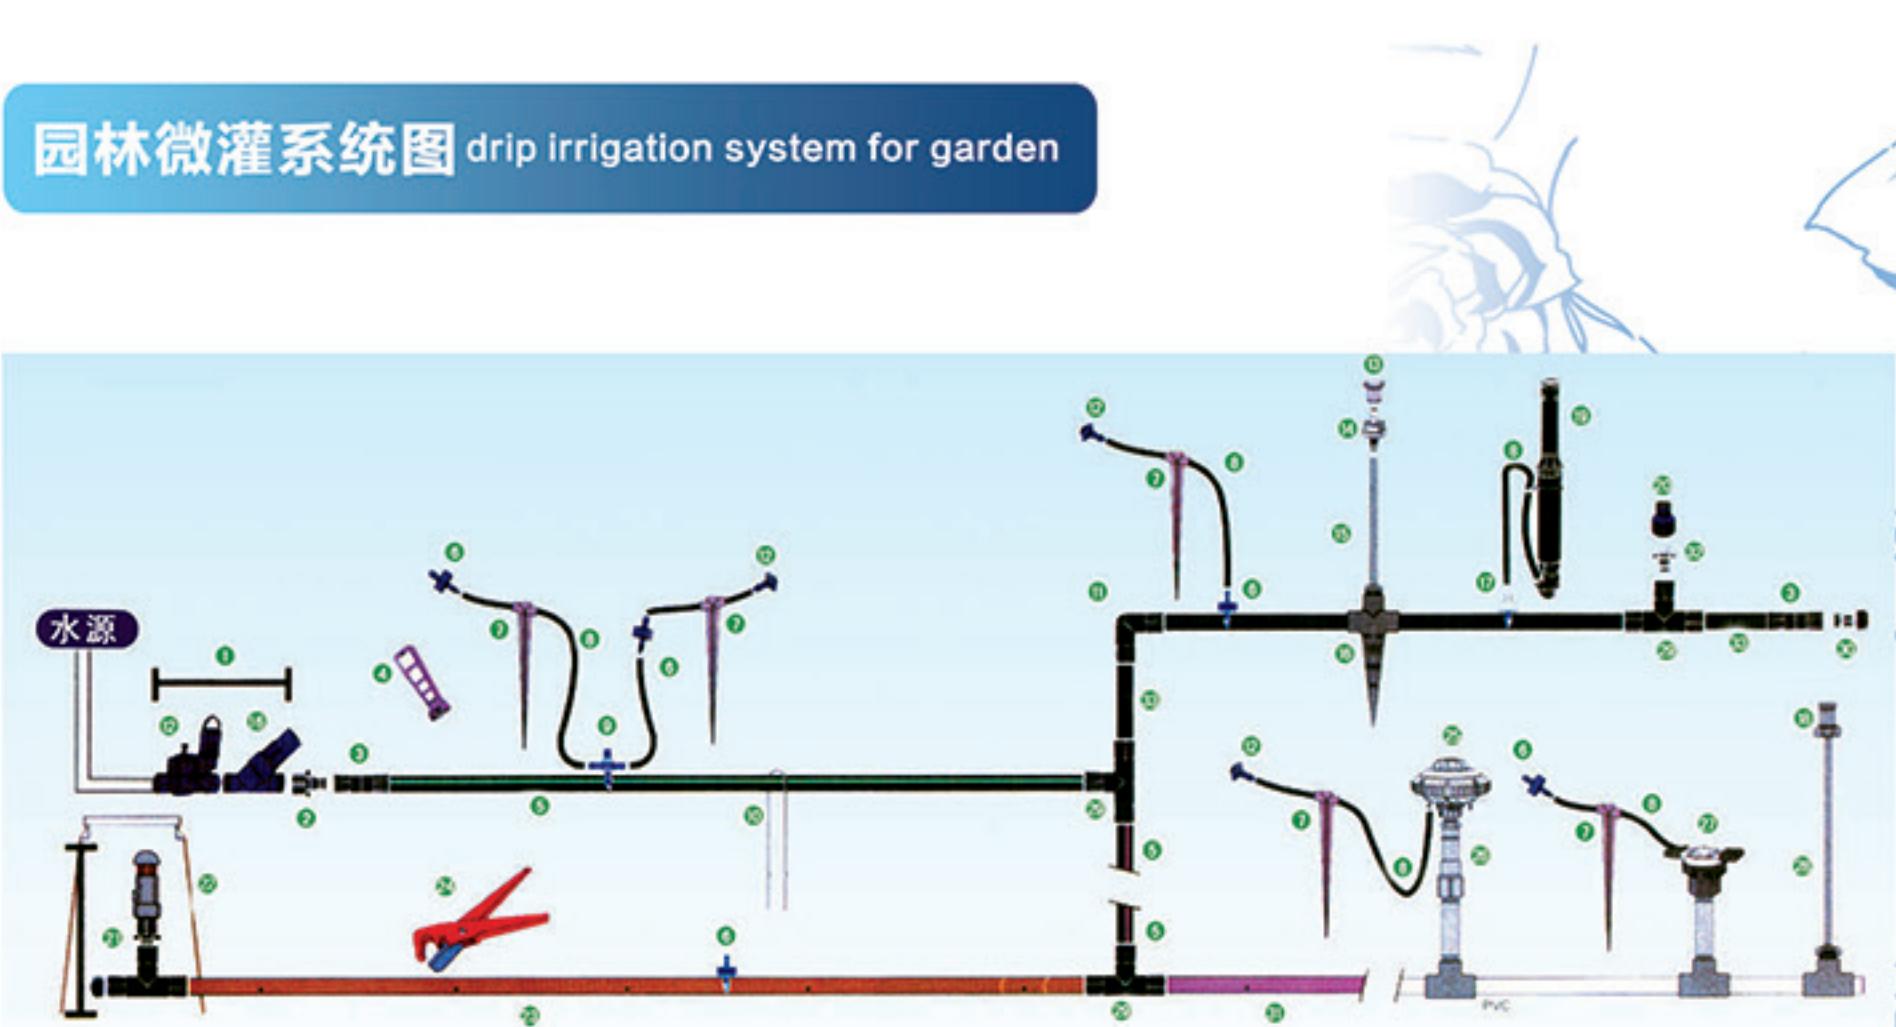

1、控制单元组件controller

1a. 阀门valve

1b. 压力调节过滤器filters

2、内丝快速接头female quick connector

3、内丝快接直通female direct connector

4、滴头扦入器drip applicator

5、PE管PE pipe

6、压力补偿滴头pressure compensating dripper

7、1/4" PE管固定插尖1/4" pipe stake

8、1/4" PE管1/4" PE pipe

9、1/4" 输水管倒刺接头1/4" barb connector

10、固定PE管卡子PE pipe clip

11、快接弯头eibow

12、分流防虫帽insect-resistant cap

13、压力补偿滴头盖drip plug

14、压力补偿滴头pressure compensating dripper

15、连接滴头和插尖的PE管转接件connector

16、带固定插尖的1/2" PE管三通1/2" PE tee

17、1/4" PE管倒刺自插接头1/4" PE pipe barb connector

18、压力补偿滴头pressure compensating dripper

19、地理式微喷头micro spray

20、涌泉喷头sprinkler

21、排气阀组件exhaust valve

22、多出口滴头/阀门防护箱dripper

23、园林滴灌管drip irrigation pipe

24、PE管切割工具PE pipe cutter

25、8出口适配器8 branches adaptor

26、管间压力调节器pressure regulator

27、6出口分水器6 branches outlet distributor

28、带有聚乙烯柔性立杆的压力补偿式喷嘴接头
pressure compensating sprinkler

29、快接三通tee

30、快接堵头末端管道冲洗用end cap

31、紫色（中水用）园林滴灌管drip irrigation pipe

32、外丝快速接头male adaptor

33、XF-700输水管XF-700 hose

工程案例 project case



公司一角 COMPANY FOCUS

