


Cable Pressurisation Equipment

This unit is based directly upon the BT approved CDU3C, but has been extended to include a built in regulator and pressure gauge, eliminating the need for separate panels. It can be supplied in either a 5 outlet, or a 10 outlet variant, with each outlet using an individual flowmeter which gives the operator an instant visual indication as to air flow within a cable or waveguide.



The 12437/H uses an efficient 1/3 HP compressor, to fill its integral receiver to a pressure in excess of 60 p.s.i. The receiver is a high capacity metal item, which has been tested and Lloyds certified at three times the units' maximum working pressure.

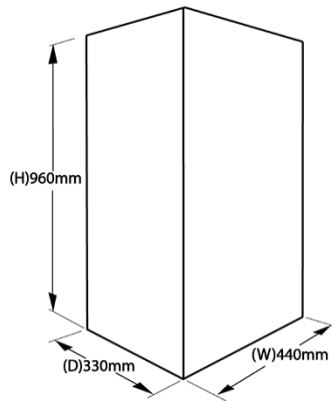

In addition to the larger receiver, which will return a shorter duty cycle on larger flow or capacity applications the unit benefits from built in compressor and receiver gauges. These gauges can help the operator to assess the condition of a unit, and help with fault finding in the event of a

failure. Another useful feature of this unit is the humidity detector test facility, which assists in fault analysis alongside the standard remote alarms.

In common with all of our current units, the 12437/H is equipped with a thermal/magnetic overload circuit breaker with neon indicator.

Dry Air Delivery	Output Pressure	Dry Air Dewpoint	No. of Outlets	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)	Operating Voltage
35 ft ³ /hr	3 – 15 psi	-35°C	5 or 10	960	440	330	60	230v AC

Drallim Industries Limited
 Millwood House, Drury Lane,
 Ponswood Industrial Estate,
 St.Leonards on Sea,
 East Sussex. TN38 9BA, UK

t +44 (0)1424 205140
f +44 (0)1424 202140
e email@drallim.com
w www.drallim.com

An ISO 9001:2008 Approved Company
 Registered Office: Registered in England No 606278

**12437/H
 FLOOR STANDING
 DEHYDRATOR**

The Drallim Group

Leading innovators in technology and quality